


EVO

400 | 400+ | 450



● CUTTING

EVO
400 | Ref. 50400
400+ | Ref. 50430
450 | Ref. 50450

EVO 400 | 400+ | 450

LARGE SIZE CUTTING MACHINE

These cutting machines are powerful, robust and very spacious. They make it possible to cut the most resistant materials and its tables can bear the weight of parts over 200kg. Adapted for workshop use, they are very easy to use and has three cutting modes: assisted, automatic and programmable (to ensure cut repeatability).

🕒 **POWERFUL**

📏 **PRECISE**

👍 **SPACIOUS**

Triple lubrication nozzle

High cooling capacities mean that you get high cutting speeds without the risk of burns.

Cutting wheel locking system

Easy installation of the cutting disk.



Easy maintenance

Easy maintenance and cleaning thanks to its interior design and its integrated spray nozzle.

High capacity tank

Lubrication system : 200L



LED lighting

Transparent hood and interior LED lighting provide great visibility.



Motorized hood

Absolute safety: open hood, both of the operator's hands are needed to move the motorized axes.



Colour touchscreen

Intuitive multilingual user interface.



Joystick control

Z axis motorized
Travel : 320 mm










Positioning laser (optional)

Fast and precise positioning of the part to be cut.

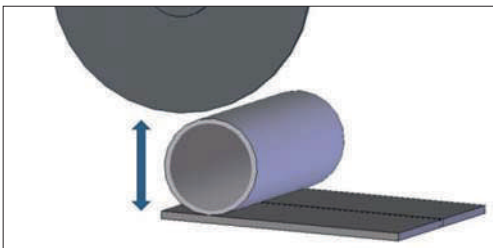

CUTTING ENVELOPE *



EVO 400 400+	EVO 450
 Ø 125 mm	 Ø 150 mm
 70 x 270 mm	 70 x 344 mm
 190 mm	 165 mm

* This illustration of the cutting envelope is to show the maximum theoretical capacity only. The actual capacity may be increased, depending on sample material, cutting frequency and selected flanges.

TABLES

LARGE WORKING SPACE

- Equipped with a 600 x 600 mm table, it can cope with very large parts weighing up to 200kg.
- Possibility to put the part by lifting means.
- The T-slotted multipurpose deck (12mm) can adapt to all clamping system.



OPTIONAL



Manual TRANSVERSE TABLE (X axis)

Travel : 200 mm
Allows easy side adjustment of the part and cutting of parallel sections.



Manual LONGITUDINAL TABLE (Y axis)

Travel : 300 mm
Increases cutting capacity.



Motorized LONGITUDINAL TABLE (Y axis)

Travel : 300 mm
Increases cutting capacity.

EVO RANGE

400 | 400+ | 450

POWERFUL MOTOR

Powerful motor boosted by a frequency controller. It allows tougher materials to be cut. Grinder rotation speed remains constant.

EVO 400

Ref. 50400



MOTOR POWER

Power S1 : 7500 W
Power S3 : 11000 W



Disk size up to 400 mm

EVO 400+

Ref. 50430



MOTOR POWER

Power S1 : 9000 W
Power S3 : 15000 W



Disk size up to 400 mm

EVO 450

Ref. 50450



MOTOR POWER

Power S1 : 11000 W
Power S3 : 18500 W



Disk size up to 450 mm

3 CUTTING MODES

POWER-ASSISTED


With the joystick, the user directly pilots the descent speed of the wheel up to a pre-programmed maximum value. It is a manual cutting, but effort-free.

AUTOMATIC

The machine cuts automatically according to parameters defined by the operator on the touchscreen. During the cutting operation, these parameters can be adjusted.

PROGRAMMABLE

The user cuts according to pre-programmed parameters, secured by password.

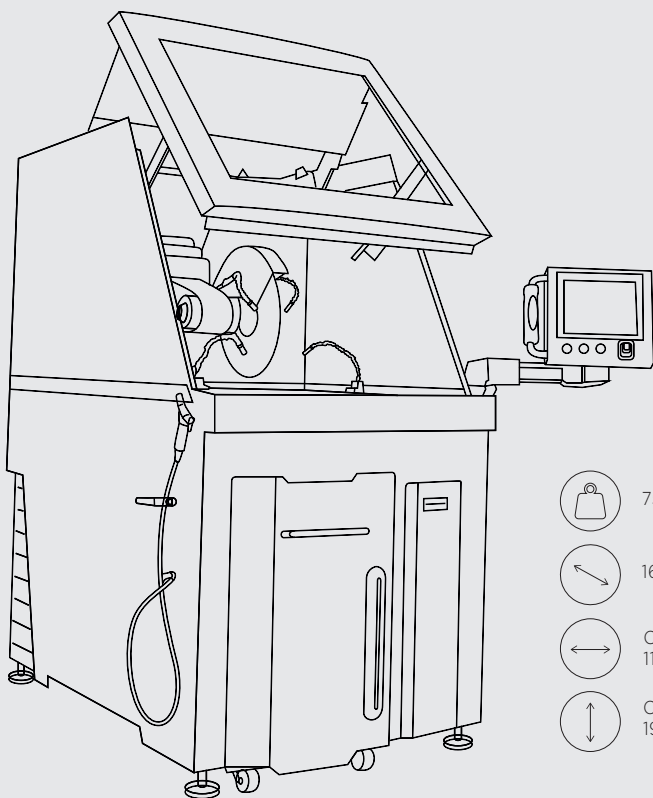

750 kg



1600 mm



Closed screen
1140 mm

CE

Open screen
1620 mm



Closed hood
1910 mm

Open hood
2380 mm

AUTOMATIC PROGRESS REGULATION

In the 3 cutting modes, and if necessary, this automatic regulator limits the speed of movement of the motorized axis when cutting stresses are too great.

2 advantages :

- To preserve the consumable
- To optimize the surface condition of the cut

PULSED SETTINGS

In automatic and programmable modes, during difficult cutting operations, it is possible to use the pulsed setting on axis Y or Z to improve part and disc cooling.

EVO 400 | 400+ | 450

	EVO 400	EVO 400+	EVO 450
Reference	50400	50430	50450
HOOD			
Metal frames & PETG	✓	✓	✓
Motorized opening and closing	✓	✓	✓
Safety : locked during motor rotation	✓	✓	✓
Fumes extraction outlet	76 mm	76 mm	76 mm
MOTORIZATION - POWER SUPPLY			
Nominal power S1	7500 W	9000 W	11000 W
Nominal power S3	11000 W	15000 W	18500 W
Power supply	380 V / Three-phases / 50 Hz	380 V / Three-phases / 50 Hz	380 V / Three-phases / 50 Hz
Control of the motor by frequency control	✓	✓	✓
CUT-OFF WHEELS			
Type of cutting disk	Resinoid & diamond	Resinoid & diamond	Resinoid & diamond
Size of cutting disk	up to 400 mm	up to 400 mm	up to 400 mm
Rotation speed	1000 to 3000 RPM	1000 to 3000 RPM	1000 to 3000 RPM
Shaft diameter	32 mm	32 mm	32 mm
CONTROL			
Control interface by colour touchscreen	✓	✓	✓
Code protection	Can be activated	Can be activated	Can be activated
Programmable up to 6 password-protected programmes	✓	✓	✓
Communication interface / Machine control	Modbus	Modbus	Modbus
CUTTING			
Cutting method : Assisted, automatic, programmed, by impulse	✓	✓	✓
Cutting regulation : movement of the arm according to motor load	✓	✓	✓
Axis Y travel	Travel 300mm* (optional)	Travel 300mm* (optional)	Travel 300mm* (optional)
Axis X travel	Travel 200mm* (optional)	Travel 200mm* (optional)	Travel 200mm* (optional)
Axis Z travel	320 mm	320 mm	320 mm
Standart table	Left table 300 x 600 mm Right table 300 x 600 mm	Left table 300 x 600 mm Right table 300 x 600 mm	Left table 300 x 600 mm Right table 300 x 600 mm
With X axis option - Manual transverse movement table	Left table 300 x 600 mm Right table 250 x 600 mm	Left table 300 x 600 mm Right table 250 x 600 mm	Left table 300 x 600 mm Right table 250 x 600 mm
With Y axis option - Manual longitudinal movement table	Left table 300 x 300 mm Right table 300 x 300 mm	Left table 300 x 300 mm Right table 300 x 300 mm	Left table 300 x 300 mm Right table 300 x 300 mm
Positioning laser	Option	Option	Option
Distance between cut-off wheel and table	190 mm	190 mm	165 mm
Treated aluminium table, interchangeable stainless steel palettes	✓	✓	✓
Holders : slotted T table (12mm)	accepting all clamping systems available on the market	accepting all clamping systems available on the market	accepting all clamping systems available on the market
LUBRICATION - COOLING			
Pump & tank : external - 200L	✓	✓	✓
Type of lubrication	Pump	Pump	Pump
Method of directing pumped coolant	Cutting disk housing and 2 mobile sprinklers on the table	Cutting disk housing and 2 mobile sprinklers on the table	Cutting disk housing and 2 mobile sprinklers on the table
Type of filtration : 100 µm washable textile filter	✓	✓	✓
ERGONOMICS			
Internal lighting	LED	LED	LED
Spray nozzle for cleaning integrated	✓	✓	✓

* Customisable tables and stroke lengths



See the video link !

ACCESSORIES

STAINLESS STEEL VICES

QUICK CLAMPING VICES

LEFT

Height 45 mm
Ref. 50905

RIGHT

Height 45 mm
Ref. 50909

LEFT AND RIGHT

Height 45 mm
Ref. 50906

Height 70 mm
Ref. 50510

Height 90 mm
Ref. 50911



SCREW CLAMPING VICES

LEFT


Height 45 mm
Ref. 50901

RIGHT

Height 45 mm
Ref. 50903

LEFT AND RIGHT

Height 45 mm
Ref. 50902



KOPAL CLAMPING SYSTEM

CHAIN CLAMP



Ref. 50617

KOPAL HOLDING



Ref. 50616

BOX OF KOPAL HOLDERS



Ref. 50613

TABLES

MANUAL TRANSVERSE TABLE (X AXIS)



Ref. 50410

MANUAL LONGITUDINAL TABLE (Y AXIS)



Ref. 50411

MOTORIZED LONGITUDINAL TABLE (Y AXIS)



Ref. 50409

OTHER ACCESSORIES

KIT OF V POSITIONING SUPPORTS



Ref. 50370

POSITIONING LASER



Ref. 50412

CONSUMABLES

REF.	DESIGNATION	DIAMETER	MATERIALS	HARDNESS
01029 01038	Type A - Abrasive Al ₂ O ₃ (ferrous materials)	Ø 400 x 3 x 32 mm Ø 450 x 3,5 x 32 mm	Low carbon, mild and extra mild	100 - 350 Hv
01027 01036	Type AO - Abrasive Al ₂ O ₃ (ferrous materials)	Ø 400 x 3 x 32 mm Ø 450 x 3,5 x 32 mm	Treated steels, stainless steels, refractory metals, alloyed cast irons	300 - 500 Hv
01034 01039	Type S - Abrasive Al ₂ O ₃ (ferrous materials)	Ø 400 x 3 x 32 mm Ø 450 x 3,5 x 32 mm	Treated steels, with fragile coatings, difficult materials	450 - 700 Hv
01028 01037	Type MNF - Abrasive SiC (non-ferrous materials)	Ø 400 x 3 x 32 mm Ø 450 x 3,5 x 32 mm	Aluminium, copper and alloys, non ferrous metals, titanium and alloys	30 - 350 Hv
01047 01048	Type T - Abrasive SiC (non-ferrous materials)	Ø 400 x 3 x 32 mm Ø 450 x 3,5 x 32 mm	Titanium, titanium alloys, non ferrous metals	50 - 400 Hv